

※ No compression

4K

3840x2160 HDMI1.4 DVI1.0

※ No latency

※ 10.2G SerDes



※ Clock Data Recovery



※ EDID Learning



Trademarks:

启鼎光电®
SMARTOPCOM

宽域视讯®
INFINIDISPLAY

Smartopcom®

INFINIDISPLAY®

Support:

+86-769-21662876

tech@smartopcom.com

More products information or
services, Please visit website:
<http://www.smartopcom.com>

4K HDMI Fiber Optic Extender

Model: HFX-2100T/R-X0

Datasheet (Release V1.0)



Features

- ※ Real-time direct transmission technology, no video compression, no signal delay
- ※ Supports HDMI v1.4, DVI 1.0, single link, up to 3.4 Gbps/color, 10.2 Gbps total
- ※ Applies duplex fiber or single fiber to connect the transmitter and the receiver
- ※ Supports lossless 4K video up to 3840x2160/30P, 4096x2160/24P, 3840x2160/60P(4:2:0), 4096x2160/60P(4:2:0), 1920x1080/60P, Compatible with other VESA standard resolutions and user-defined resolutions
- ※ Support 3840*2160/30P resolution with color depth up to 8 bits/pixe
- ※ Support HDMI bit-rates up to 3.4 Gbps/color, 10.2 Gbps total
- ※ HDCP/EDID pass-through is not supported, Support 3D TV pass-through
- ※ Support EDID learning, transmitter includes EDID memory to cache the EDID from any display
- ※ Support LPCM 7.1, Dolby® TrueHD, and DTS-HD Master Audio™
- ※ Receiver built-in Re-time chip, jitter Cleaning for best compliance
- ※ Supports ultra long distance transmission up to 80 km*(default SFP+ only 1.4km)
- ※ Low RFI / EMI profile for sensitive applications
- ※ Plug-and-play, Hot-pluggable, Rack-mountable

Note:

The maximum transmission distance may vary depending on the fiber type, bandwidth, connector splicing, losses, model, chromatic dispersion, environmental factor, and kinks.

Applications

- ※ Seat Collaboration Manage System
- ※ Remote monitor for traffic, industrial, military control
- ※ Airplane On-board Video System
- ※ Passenger Information System
- ※ Factory assembly line
- ※ TV Broadcast Station
- ※ LED signboards in streets and in stadiums
- ※ Large video wall system
- ※ LCD, Projector, Plasma display connection
- ※ Medical Imaging Equipment
- ※ Conference Room Video Equipment
- ※ Home Theater

©2013 Smart Optical Communication Co., Ltd. All Rights Reserved.



All trademarks are the property of their respective owners. we reserves the right to make changes in the hardware, packaging, and any accompanying documentation without prior written notice.





Specification

Video	HDMI v1.4, DVI 1.0	
Max. Pixel Clock	340 MHz	
Max. Data Rate	10.2 Gbps (3.4 Gbps Per Lane)	
Max. Resolution	3840x2160/60P(YCbCr 420), 4096*2160/60P(YCbCr 420) 3840x2160/30P, 4096x2160/24P, 1920x1200/60P, 1920x1080/60P, Compatible with other VESA standard resolutions and user-defined resolutions	
Digital Audio Support	7.1 channel LPCM, 192 KHz, 24-bit	
Connections		
HDMI Input / Output	TX: 1 x HDMI Type A Female RX: 1 x HDMI Type A Female	
FIBER	1x SFP+	
Fiber Optics		
Fiber Cable Type /Max. Length	50/125μ OM3: ≤300m (Default)	
	9/125μ Single mode fiber: ≤1.4km (Default)	
	9/125μ Single mode fiber: ≤80km (Max. Length)	
Control		
KVM	N/A	
Audio	N/A	
IR/RS232/RS485	N/A	
CEC	N/A	
DDC (Digital Display Channel) /HDCP		
EDID	EDID Quick Copy, User-programmable EDID memory, eliminates the need for DDC connection	
HDCP	N/A	
Physical Properties		
Housing	Alufer enclosure	
Dimensions (W x D x H)	88.8mm x 85mm x 29 mm (without bracket) 131.8mm x 85mm x 29 mm (with bracket)	
Weight	HFX-2100T: 450g HFX-2100R: 450g	
Environmental		
Operating Temperature	0 to +50° C	
Storage Temperature	-40°C to +85°C	
Operating Humidity	5% to 80% (non-condensing)	
Storage Humidity	5% to 95% (non-condensing)	
Power Requirements		
External AC Power Adapter	Input: 100-240VAC / 50-60Hz 0.2A Output: DC 5V, 2.0A 5/2.5mm jack	
Power Consumption	HFX-2100T: 5 W HFX-2100R: 5W	
Warranty		
Limited Warranty	2 year warranty	

TRANSMITTER

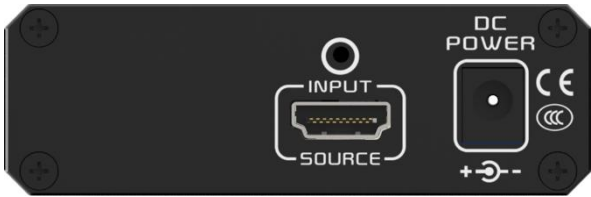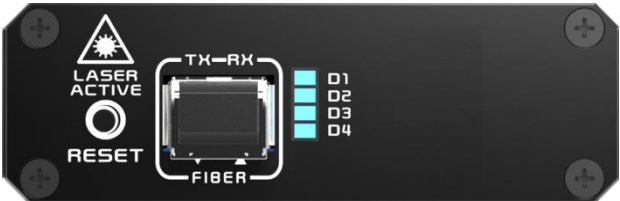


RECEIVER

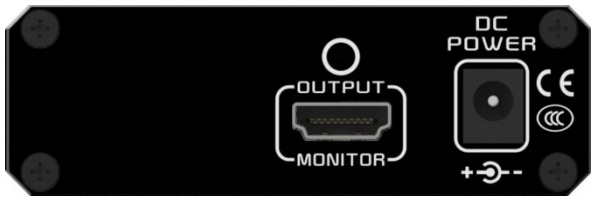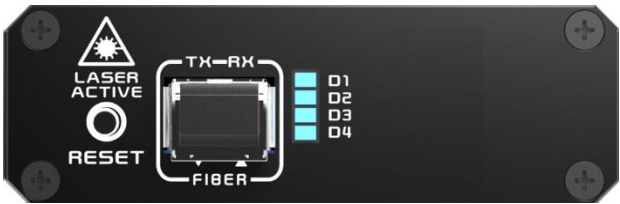

Port	TRANSMITTER	RECEIVER
HDMI Port	HDMI INPUT: HDMI signal input	HDMI OUTPUT: HDMI signal output
RESET	System reset button /EDID R/W button	System reset button
POWER	Power adapter socket	Power adapter socket
FIBER	SFP+ Module Cage	SFP+ Module Cage
LED indicator		
D1	ON: Power on OFF: Power off	ON: Power on OFF: Power off
D2	ON: Monitor connected OFF: Monitor disconnected EDID Copy: When the monitor is connected to the HDMI input, press the reset button, the LED will flash rapidly for 32 times, and the LED will turn off after the copy is successful	ON: SFP+ TX enable OFF: SFP+ TX disable
D3	OFF:The input optical power is normal ON: Lost of Optical signal	OFF:The input optical power is normal ON: Lost of Optical signal
D4	ON: Source connected Blinking:Output signal	ON: Monitor connected Blinking:Output signal




Diagram

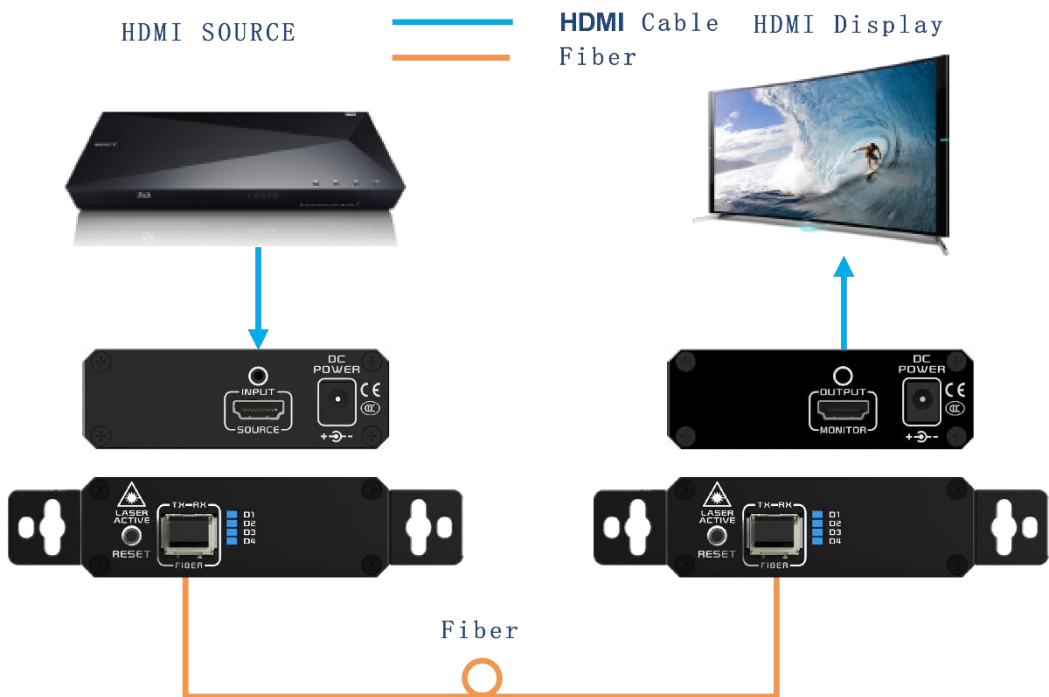

Instructions

Video	
1.	TX: Connect your source device to the TX unit.
2.	RX: Use an HDMI cable to connect your video display to the HDMI Out port on the RX unit.
Fiber	
3.	Plug the SFP+ Modules to the Optical Ports on your TX unit and RX unit, and then connect the two SFP+ modules using a duplex fiber optic cable.
EDID Copy	
4.	1. Connect your display to the TX unit. Power on the TX unit, display. 2. pressing the reset button, D2 indicator will flash for a few seconds, The D2 turn off indicates that the program is completed. 3. Connect your source device to the TX unit. Connect your display to the RX unit. 4. Power on the TX unit, RX unit, and the connected devices.
Power	
5.	Plug the Power Adapter cable into the Power Jack on the TX unit and RX unit. Power on the TX unit, RX unit, and the connected devices.
Reset	
6.	If the Extender fault during operation, the system can be reset by pressing the reset button, which can solve some Extender faults. If the fault cannot be eliminated by pressing the reset button, please power on the equipment again.

Dimensions (mm)

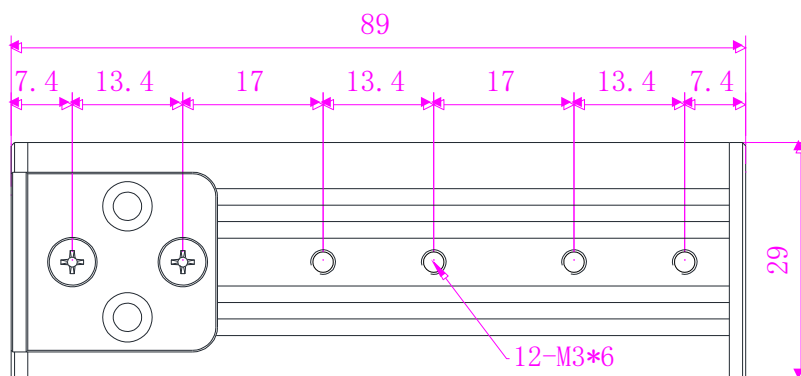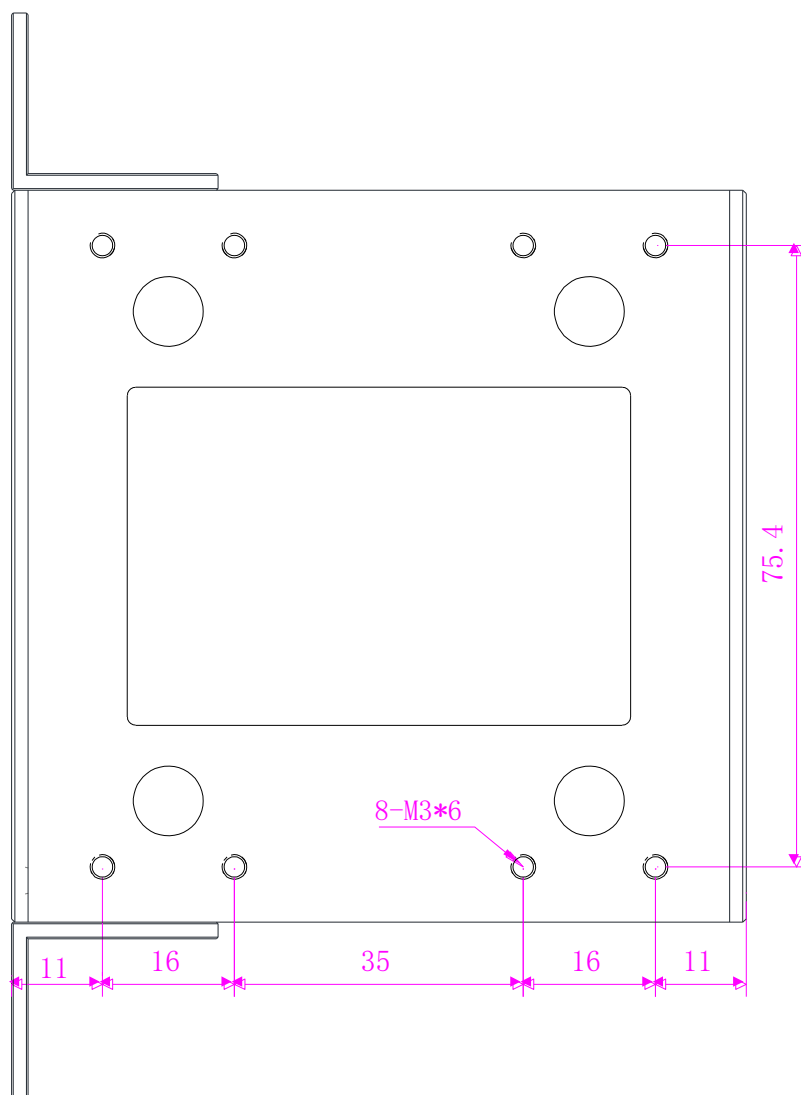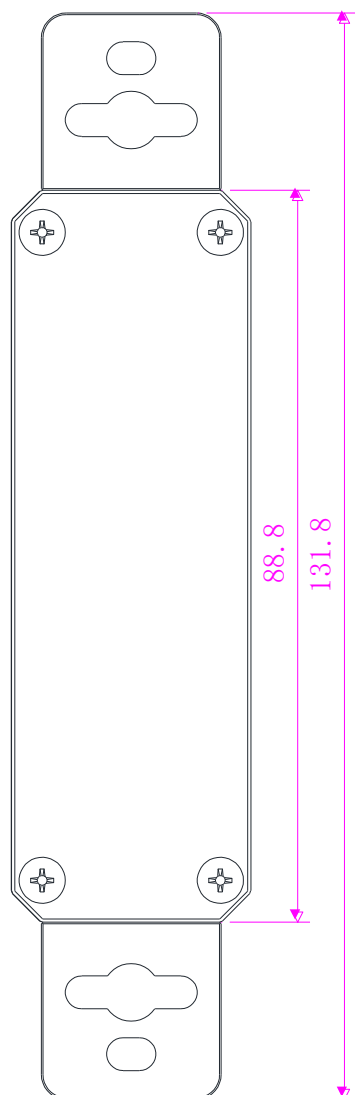

Packing list

The 4K HDMI Fiber Optic Extender ships with the items listed below. If any of these items are not present in the box when you first open it, immediately contact your dealer or Smartopcom.

- ※ 1 x HFX-2100T (TX)
- ※ 1 x HFX-2100R (RX)
- ※ 2 x 5V/2A DC Power adapter
- ※ 1 x Datasheet

Ordering information

P/N	Description
HFX-2100T/R	Duplex Fiber 4K HDMI Fiber Optic Extender, 300m
HFX-2100T/R-D1.4	Duplex Fiber 4K HDMI Fiber Optic Extender, 1.4Km
HFX-2100T/R-D10	Duplex Fiber 4K HDMI Fiber Optic Extender, 10Km
HFX-2100T/R-D20	Duplex Fiber 4K HDMI Fiber Optic Extender, 20Km
HFX-2100T/R-D40	Duplex Fiber 4K HDMI Fiber Optic Extender, 40Km
HFX-2100T/R-D60	Duplex Fiber 4K HDMI Fiber Optic Extender, 60Km
HFX-2100T/R-D80	Duplex Fiber 4K HDMI Fiber Optic Extender, 80Km
HFX-2100T/R-S10	Single Fiber 4K HDMI Fiber Optic Extender, 10Km
HFX-2100T/R-S20	Single Fiber 4K HDMI Fiber Optic Extender, 20Km
HFX-2100T/R-S40	Single Fiber 4K HDMI Fiber Optic Extender, 40Km
HFX-2100T/R-S60	Single Fiber 4K HDMI Fiber Optic Extender, 60Km
HFX-2100T/R-S80	Single Fiber 4K HDMI Fiber Optic Extender, 80Km
FSE-01	Bracket

Safety Instructions

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this product near water.
6. Clean only with a dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install or place this product near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. To reduce the risk of electric shock and/or damage to this product, never handle or touch this unit or power cord if your.
13. hands are wet or damp. Do not expose this product to rain or moisture.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
15. Unplug this apparatus during lightning storms or when unused for long periods of time.
16. Batteries that may be included with this product and/or accessories should never be exposed to open flame or excessive heat. Always dispose of used batteries according to the instructions.

Rack Mounting

1. Before working on the rack, make sure that the stabilizers are secured to the rack, extended to the floor, and that the full weight of the rack rests on the floor. Install front and side stabilizers on a single rack or front stabilizers for joined multiple racks before working on the rack.
2. Always load the rack from the bottom up, and load the heaviest item in the rack first.
3. Make sure that the rack is level and stable before extending a device from the rack.
4. Use caution when pressing the device rail release latches and sliding a device into or out of a rack; the slide rails can pinch your fingers.
5. Do not overload the AC supply branch circuit that provides power to the rack. The total rack load should not exceed 80 percent of the branch circuit rating.
6. Make sure that all equipment used on the rack – including power strips and other electrical connectors – is properly grounded.
7. Ensure that proper airflow is provided to devices in the rack.
8. Ensure that the operating ambient temperature of the rack environment does not exceed the maximum ambient temperature specified for the equipment by the manufacturer.
9. Do not step on or stand on any device when servicing other devices in a rack.